


SISTEMI OKRETNOG OTVARANJA MULTILOCK 5600i² / C.E.5200i²



E900

WK2

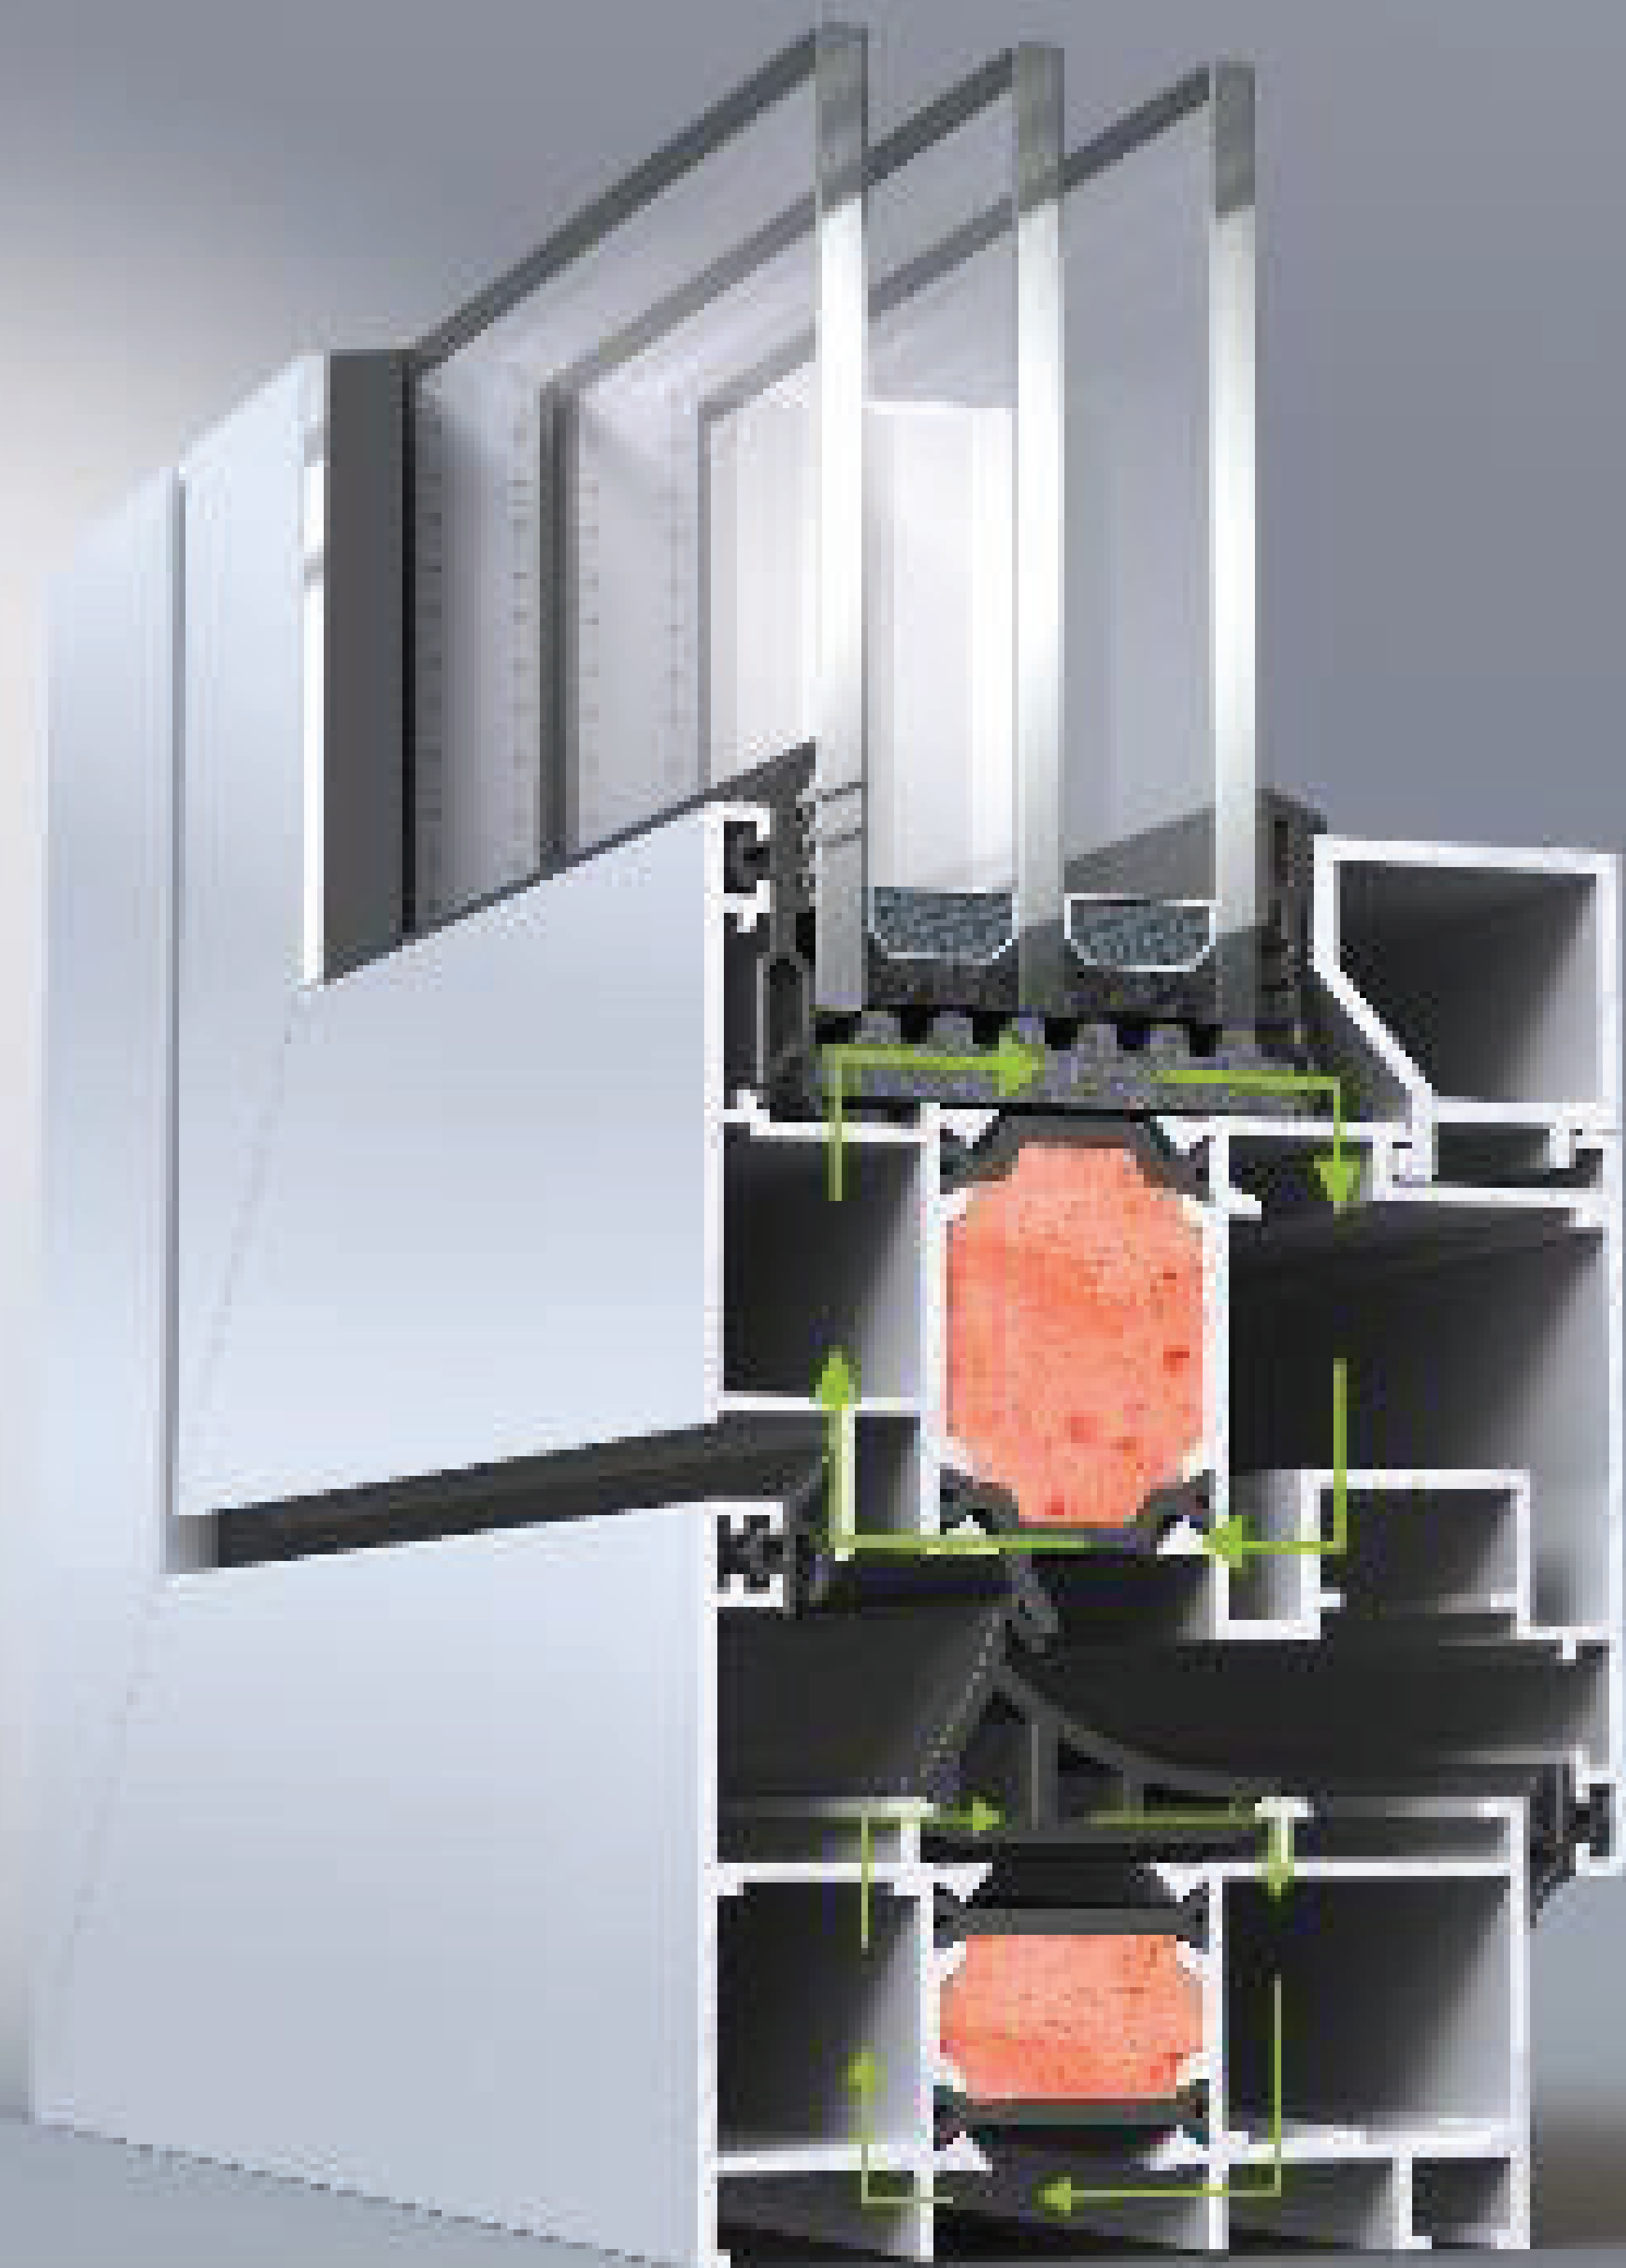

VISOKA TOPLOTNA IZOLACIJA

U_f : **1.7-2.4** W/m²K

U_w*: **1.6** W/m²K sa duplim zastakljenjem (U_g: 1.0)

U_w*: **1.3** W/m²K sa trostrukim zastakljenjem (U_g: 0.6)

SIGURNOST

Sertifikovani bezbednosni nivo **WK2**, sa do **21 tačkom zaključavanja po obimu** (5600i²).

SISTEMI OKRETNOG OTVARANJA MULTILOCK 5600i² / C.E.5200i²



E900


WK2



NAPREDNO ZAPTIVANJE, KOJE SE SASTOJI OD

- **EPDM guma spojnice** za centralnu gumu, spoljašnje zastakljivanje i perimetričnu gumu.
- Optimizovani EPDM uzorak za povezivanje reducira sa čepovima centralne gume, za efektivnu vodonepropusnost.

TRAJANJE ZA CEO ŽIVOT

 **2.35 m**  **1.35 m / krilo**  **130 kg / krilo**

 Zastakljivanje do **53mm**

 Osnovna Dubina Sistema **66.9 mm / 75.2 mm**

 Minimalna Širina Face F-S **108.2 mm**